

GENERAL APPLICATIONS

- Confined space fresh air supply
- Fume removal (degassing)
- Process cooling
- Equipment cooling
- Source capture fume exhaust or filtration
- Personnel heat stress relief
- Air curing and drying of paints and coatings

FEATURES / ADVANTAGES

- One-year warranty
- Large product selection to meet nearly any portable ventilation or cooling need
- Vaneaxial and centrifugal designs
- Choice of drives: electric, pneumatic, steam, or water
- Explosion-proof models
- Premium heavy-duty, continuous-operation motors
- Heavy-duty construction to meet industry demands
- Accommodates flexible duct
- Accessories

TECHNICAL ASSISTANCE

Our engineers are available during normal business hours (8 a.m. - 5 p.m. ET) to assist with equipment operation or application inquiries. Instruction manuals that include parts lists and engineering drawings are available as PDF documents. For a listing of available literature or to request a specific document please send us an email or use our customer service line.

CUSTOMER SERVICE

Tel: 508-595-1700

888-268-8726 (toll free)

Fax: 508-595-1786

email: info@dresser-rand.com URL: www.dresser-rand.com

TRAINING


We offer free training in the operation of COPPUS equipment for confined space ventilation. (Please note that this is not a certified training program for confined space procedures.) For more information, contact your local representative or our customer service department.

PLACING YOUR ORDER

To ensure fast, accurate processing of your order, please use the following procedures. If you need assistance contact your local representative or our customer service department.

- All orders must be in writing on a purchase order or on company letterhead with an authorized signature.
- Orders should be made out to: Dresser-Rand c/o your local representative.
- Include correct part number(s), model, description and pricing.
- For tax exempt orders, submit your current sales tax exemption certificate on file with the state to which the order is being shipped. All other orders will be taxed at the prevailing sales tax rate of the states to which they are shipped.
- We accept Visa, MasterCard and American Express.



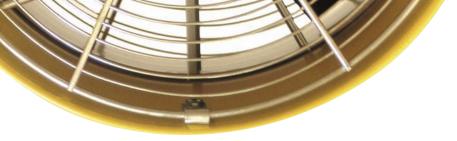

COPPUS® QUICK REFERENCE GUIDE

PRODUCT	MOTOR TYPE	FAN SIZE AND TYPE	AIR FLOWS cfm (m³/hr)	FEATURES	PAGE
CADET	Electric or Gas TE* or EP**	8" (203 mm) Vane- axial and Centrifugal	560-1,300 (933-2,209)	Lightweight and compact	5-6
VANO 175CV, 250CV	Electric 8" (203 mm) and 12" TE and EP (305 mm) Vaneaxial		1,500-3,000 (2,549-5,098)	Rugged, durable, low-profile design for high air volume	7-8
AIR MAX 12	Electric TE	12" (305 mm) Vaneaxial	2,200 (3,735)	Lightweight, compact, high air volume	9
TA16-5000 TA16-5500	Electric TE and EP	16" (406 mm) Tubeaxial	5,000-5,500 (8,495-9,345)	Heavy-duty, high volume for exhaust and fresh air	10
ACCESSORIES				Add convenience and improve production	17
AIR DUCT				Large selection of flexible duct and duct canisters	17
COLDFRONT INDUSTRIAL KIT	Electric	N/A	N/A	Turn any COPPUS fan into a "super cooler"	11
COLDFRONT COMPACT KIT	Electric	N/A	N/A	Heavy-duty compact pump designed for easy transport	12
VENTAIR	Electric TE and EP	8" (203 mm) to 16" (406 mm) Centrifugal	1,700-10,700 (2,885-18,179)	Five sizes up to 30 HP; supply air to multiple work areas	13
PORTAVENT	Electric TE and EP	5" (127 mm) and 6" (152 mm) Centrifugal	560-940 (951-1,597)	Ideal for removing welding fumes; multi-position stand	14
DOUBLE-DUTY HEAT KILLER	Electric TE and EP	18" (457 mm), 24" (610 mm) and 30" (762 mm) Vaneaxial	4,100-17,000 (6,970-28,890)	Adjustable guide vanes for versatile air flow patterns	15-16
JECTAIR JECTAIR HORNET	Compressed Air	8" (203 mm) to 14" (356 mm) Venturi	1,370-8,900 (2,328-15,121)	High-air flows, lightweight, maintenance-free	21-22
RF-12, RF-16 (REACTION FANS)	Compressed Air	12" (305 mm) and 16" (406 mm) Axial	2,140-5,100 (3,636-8,665)	Ideal for hazardous locations; all aluminum-cast housing	19-20
RF-20, RF-24 (REACTION FANS)	Compressed Air	20" (508 mm) and 24" (610 mm) Axial	11,000-16,900 (18,689-28,700)	Bolts directly to tanks with standard API manways	19-20
CP-20	Steam or Air	20" (508 mm) Axial	11,200 (19,029)	Bolts directly to standard API 20-inch manway	18
MARINE VENTILATORS	Steam, Air and Water	12" (305 mm) and 15" (381 mm) Axial	4,600-8,400 (7,815-14,275)	Cargo tank ventilators; mates to 12.5 inch (318 mm) deck opening	23
MARINE VENTURI	Compressed Air	Venturi	3,980-4,870 (6,762-8,274)	Lightweight; mates to 12-inch (305 mm) deck opening	24

3

*TE: Totally enclosed motor **EP: Explosion-proof motor

REFERENCE

FREQUENTLY ASKED QUESTIONS

ARE ALL COPPUS VENTILATORS UL LISTED?

All electrical components (motors, starters, switches, junction boxes, cord, plugs, etc.) are UL listed.

WHAT TYPE OF VENTILATOR DO YOU RECOMMEND FOR EXPLOSION-PROOF ENVIRONMENTS?

If compressed air is available as your utility, we recommend our RF series ventilators or our Jectair (venturi style) air movers. Pneumatic-drive ventilators are often desirable for hazardous locations. If electric drive is preferred or required, we offer most of our fans and ventilators in explosion-proof models. Explosion-proof units require all electrical connections to be enclosed, and moving mechanical pieces to be constructed of material so as not to create sparks. This requires special motors and starters, as well as fan blades and other moving parts to be made of non-sparking materials such as aluminum, stainless steel, fiberglass or plastic.

WHY ARE PLUGS NOT STANDARD ON EXPLOSION-PROOF UNITS?


Local electrical codes can vary for hazardous location equipment operation, creating a variety of different plug-receptacle configurations. We recommend that either the plug be installed by a local electrician, or the type and part number of the correct plug be submitted to us in writing for factory installation to ensure local code compliance.

WHAT IS THE MAXIMUM HORSEPOWER I CAN USE WITH 115V POWER?

A 1.5 HP motor is the largest practical power unit to effectively run on singlephase power. A larger HP motor will generate very large current in-rushes, tripping the electrical protection breaker.

IS THERE A DIFFERENCE IN AIR VOLUME ON THE SUCTION AND DISCHARGE OF THE VENTILATOR?

No. The given air volume is the same whether the ventilator is used as an exhauster or blower. However, there is a significant difference in the air velocity at a given distance away from the fan. For example: one foot (305 mm) away from the suction end of a 12" (305 mm) fan, the air velocity will drop by 90 percent compared to only a three percent drop on the supply side.



Air velocity is reduced as the distance from the fan increases on both the inlet (exhaust) and outlet (delivery) sides. However the rate of reduction in air velocity is significantly greater on the inlet side of the fan.

d = diameter of the fan face

x = air velocity of the fan face

COMMON PORTABLE VENTILATION TERMS

CONFINED SPACE

Large enough area to be occupied by an individual, but with limited or restricted means for entry or exit; not normally designed for continuous occupancy.

CFM

Cubic feet per minute—measurement of flow handled by a fan.

STATIC PRESSURE

Usually expressed in inches water gauge (Wg); pressure measured in a direction normal to the air flow; static pressure combined with velocity pressure equals total pressure.

BLOCKED TIGHT STATIC PRESSURE

Operating condition in which the fan outlet is completely closed, resulting in no air flow.

FREE AIR DELIVERY


Maximum airflow where static pressure across the fan is zero.

CAPTURE VELOCITY

Air velocity at any point in front of the hood opening necessary to overcome opposing air currents and to capture the contaminated air at that point.

DECIBEL LEVELS

Sound data on COPPUS products are based on tests conducted with units operating at published speeds. No attachments for attenuating sound were used [dBA levels recorded at 5' (1.5 m)].

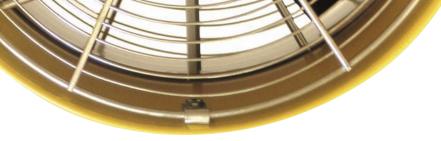

COPPUS® CADET®

VANEAXIAL AND CENTRIFUGAL MODELS,
ELECTRIC DRIVES

IDEAL FOR UTILITY
UNDERGROUND
AND LIGHT INDUSTRIAL
CONFINED SPACE
VENTILATION

These versatile, rugged, and economical ventilators deliver exceptional air flow in a compact, lightweight design—and their non-corrosive injection-molded housing is nearly indestructible. They are ideal for utility underground and light manufacturing confined space ventilation, and are available in a variety of models.

VANEAXIAL MODELS

- Flame-resistant injection-molded housing (5VA is the highest UL flame retardant rating possible)
- Glass-filled, polyester resin, spark-resistant fan blade
- Accommodates 8-inch (203 mm) flexible duct





MODEL VEP

Vaneaxial Hazardous Location Electric Drive

MODEL VAC

VANEAXIAL MODELS

MODEL	DRIVE MOTOR		HP	WEI	GHT	FREE	AIR
				lbs	kg	cfm	m³/hr
VAC1	Electric 115V/60Hz	TE	1/2	35	16	867	1465
VAC2	Electric 110V/50Hz	TE	1/2	35	16	804	1358
VAC3	Electric 230V/60Hz	TE	1/2	35	16	867	1465
VAC4	Electric 220V/50Hz	TE	1/2	35	16	804	1358
EV1	Electric 115V/60Hz	TE	1/4	27	12	1300	2197
VEP1	Electric 115V/60Hz	EP	1/2	40	19	867	1465
VEP2	Electric 110V/50Hz	EP	1/2	40	19	804	1358
VEP3	Electric 230V/60Hz	EP	1/2	40	19	867	1465
VEP4	Electric 220V/50Hz	EP	1/2	40	19	804	1358

PERFORMANCE THROUGH 90-DEGREE BEND(S)

1-90 I	Degree	2-90	Degree	3-90 Degree		
cfm	cfm m³/hr		m³/hr	cfm	m³/hr	
776	1318	766	1301	756	1284	
730	1240	720	1223	710	1206	
776	1318	776	1301	756	1465	
730	1240	720	1223	710	1206	
730	1240	659	1119	602	1023	
776	1318	766	1301	756	1284	
730	1240	720	1223	710	1206	
776	1318	766	1301	756	1284	
730	1240	720	1223	710	1206	

ELECTRIC						
ITEM	dBA					
VAC1	88					
CAC1	78					

CENTRIFUGAL MODELS

- Excellent air flow and pressure performance
- Flame-resistant UL94-5VA injection-molded housing
- Glass-filled, polyester resin spark-resistant fan blade
- Accommodates 8-inch (203 mm) duct at inlet and outlet ends
- Fan scroll can be positioned easily at 45-degree, 90-degree, and 180-degree discharge angles
- Available in electric and gasoline-driven models



HAZARDOUS LOCATION MODELS

- Housing and components are constructed of special conductive polymers for safe dissipation of static charges
- Electric motors meet NEC Class 1, Division 1, Group D and Class II, Division I, Groups E, F, G specifications
- Available in vaneaxial and centrifugal models



CENTRIFUGAL MODELS

				WEIGHT		FREE	AIR
MODEL	DRIVE	MOTOR	HP	lbs	kg	cfm	m³/hr
CAC1	Electric 115V/60Hz	TE	1/2	35	16	1014	1722
CAC2	Electric 110V/50Hz	TE	1/2	35	16	845	1428
CAC3	Electric 230V/60Hz	TE	1/2	35	16	1014	1722
CAC4	Electric 220V/50Hz	TE	1/2	35	16	845	1428
CEP1	Electric 115V/60Hz	EP	1/2	35	16	1014	1722
CEP2	Electric 110V/50Hz	EP	1/2	35	16	845	1428
CEP3	Electric 230V/60Hz	EP	1/2	35	16	1014	1722
CEP4	Electric 220V/50Hz	EP	1/2	35	16	845	1428

PERFORMANCE THROUGH 90-DEGREE BEND(S)

1-90 I	Degree	2-90	Degree	3-90	Degree
cfm	m³/hr	cfm	m³/hr	cfm	m³/hr
860	1461	845	1436	830	1410
717	1218	704	1196	692	1176
860	1461	845	1436	830	1410
717	1218	704	1196	692	1176
860	1461	845	1436	830	1410
717	1218	704	1196	692	1176
860	1461	845	1436	830	1410
717	1218	704	1196	692	1176



RELIABLE, **VENTILATOR MODELS**

RUGGED, COPPUS ventilators revolutionized air moving equipment more than 60 years ago with the introduction of the VANO models. The VANO models offer a fixed guide vane design that delivers high volumes of air while maintaining static pressure for exhausting fumes and delivering fresh air. A rugged, durable, high-performance design makes the VANO models ideal for ventilating tanks, process vessels, tank cars, manholes and other confined spaces.

MODEL 175CV: 3/4 HP

1,500 cfm (2,549 m³/hr)

MODEL 250CV: 1 HP

3,000 cfm (5,098 m³/hr)

FEATURES

- Straightening fixed guide vanes for improved static pressure performance
- Accepts ducting at inlet and outlet ends
- Converts for exhausting fumes from bottom of tanks
- Available with totally enclosed (TE) or explosionproof (EP) motors and compatible switch; all models supplied with 15' (4.572 m) power cord
- Heavy-gauge, powder-coated steel and cast aluminum construction
- Spark-resistant fan blades
- Automatic reset thermal overload protection standard on VANO 175CV and 250CV models
- Optional tripod and transport cart







Optional tripod available. See page 17.

CONVERTIBLE DESIGN


By simply removing the inlet sleeves, the VANO 175CV and 250CV convert to vertical exhaust units






WITH INLET SLEEVE INSTALLED

The flexible duct can be attached to inlet and outlet ends. This allows fumes to be exhausted from a confined space, or fresh air delivered from a remote area.



WITH INLET SLEEVE REMOVED

Cut-outs on inlet end of CV models are exposed for exhausting heavier-than-air fumes from the bottoms of tanks, vats, drums and other confined spaces.



HAZARDOUS LOCATION MODELS

VANO models are available with hazardous location (EP)* motors that meet NEC Class I, Division I, Group D and Class II, Division I, Groups E, F, G specifications

*EP models do not include plugs

PERFORMANCE SPECIFICATIONS

AIR FLOW THROUGH FLEXIBLE DUCT - STRAIGHT RUNS [cfm (m³/hr)]


MODEL		foot 5 m)	20 foot (6.10 m)		30 foot (9.15 mm)		50 foot (15.25 m)	
	cfm	m³/hr	cfm	m³/hr	cfm	m³/hr	cfm	m³/hr
175CV	1,400	2,379	1,300	2,209	1,200	2,039	1,080	1,835
250CV	2,940	5,098	2,620	4,452	2,480	4,214	2,300	3,908

Performance schedule represents 60Hz synchronous speeds; 50Hz models perform at approximately 80 percent of listed schedules.

VARIOUS STATIC PRESSURES [cfm (m³/hr)]

MODEL	FREE AIR		0.5 in WG 13 mm		0.75 in WG 19 mm		1.0 in WG 25 mm	
	cfm	m³/hr	cfm	m³/hr	cfm	m³/hr	cfm	m³/hr
175CV	1,500	2,549	1,350	2,294	1,280	2,175	1,230	2,095
250CV	3,000	5,098	2,620	4,452	2,480	4,214	2,300	3,908

ELECTRIC					
ITEM dBA					
VANO 175CV	90				
VANO 250CV	92				

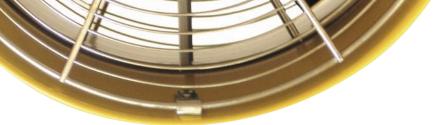

COPPUS® Air MAX-12

HIGH-VOLUME BLOWER supply.

ECONOMICAL, This 12" (305 mm), lightweight, rugged blower delivers up to 2,200 cfm (3,740 m³/hr) TUBE AXIAL for confined space ventilation and fresh air



FEATURES

- Rugged, all-steel housing construction
- Integral on/off motor switch
- Fixed guide vanes for improved performance
- Glass-reinforced, polypropylene, non-sparking fan blade
- 20' (6.1 m) cord with GFCI at plug end
- Anti-vibration foot pads



SPECIFICATIONS

MOTOR: TE 3/4 HP with integral on/off switch, 115V/6.8 amp, Class B insulation, auto reset thermal overload protection; attached 20' (6.1 m) heavy-duty cord with GFCI shut-off at plug end

FREE AIR: 2,200 cfm (3,740 m³/hr)

WEIGHT: 44 lbs (18.14 kg)

HOUSING: 18-gauge steel, powder-coated with carry handle and anti-vibration foot pads; rolled bead on ends for added strength and attaching flexible ducting; safety screens attached per OSHA guidelines

Please note: Not available for Class 1, Div. 1 (hazardous locations) applications

AIR FLOW THROUGH DUCT (STRAIGHT RUNS) cfm (m3/hr)

MODEL	FREE AIR		10 foot (3.05 m)		20 foot (6.10 m)		30 foot (9.15 m)	
	cfm	m³/hr	cfm	m³/hr	cfm	m³/hr	cfm	m³/hr
Air MAX	2,200	3,740	2,120	3,602	2,025	3,440	1,890	3,211

ELECTRIC					
ITEM	dBA				
AirMax 12	74				

COPPUS® TA16

DELIVERS LARGE VOLUME WITH HIGH-STATIC PRESSURE CAPABILITIES

The unique fan blade design not only allows exceptionally high air volume but also maximizes static pressure for better performance through longer runs of air duct. Typical ventilation applications include large tanks, tunnels, towers, and shipboard compartments; this fan also is ideal for product and process cooling.





FEATURES

- TE or EP motor
- Thermal overload protection
- Powder-coated, heavy-gauge steel housing
- Cast-aluminum or glass-filled fan blade provides spark-resistance
- Skid-mounted for stability (optional casters available)
- Duct can be connected at inlet and outlet ends
- Optional caster kit available

MODEL TA16-5500

2-HP, 5,500 cfm (9,345 m³/hr) free air

MODEL TA16-5000

1 1/2-HP, 5,000 cfm (8,495 m³/hr) free air

D-R

TA16 with optional locking casters.

PERFORMANCE SPECIFICATIONS

AIR FLOW THROUGH FLEXIBLE-DUCT-STRAIGHT RUNS cfm (m³/hr)

ELECTRIC		MODEL		10 foot (3.05 m)		50 foot (15.25 m)		100 foot (30.5 m)	
			cfm	m³/hr	cfm	m³/hr	cfm	m³/hr	
ITEM TA16	dBA 96	TA16-5500 2 HP	5,320	9,039	4,775	8,113	4,250	7,721	
IAIU	70	TA16-5000 1 1/2 HP	4,835	8,215	4,340	7,379	3,875	6,585	

COPPUS® COLDFRONT



EVAPORATIVE Evaporative cooling has been recognized for COOLING years as an economical and efficient way to SYSTEM reduce ambient temperatures in high-heat environments. Dresser-Rand has harnessed the power of evaporative cooling with its industrial COPPUS COLDFRONT cooling system and compact COLDFRONT kits.

INDUSTRIAL COLDFRONT

Transforms high-velocity COPPUS fans into "super coolers" capable of reducing high ambient temperatures 10-25° Fahrenheit depending on the relative humidity range.

FEATURES

- Heavy-gauge, powder-coated steel enclosure
- 10" (254 mm) pneumatic wheels and front-locking caster for easy mobility
- High-pressure, quick-connect hose
- Heavy-duty, 1,200 PSI triplex bronze pump accommodates up to six misting rings
- 5-micron water filter
- Kit includes: 25' (7.62 m) high-pressure hose, 20" (508 mm) or 16" (406 mm) stainless steel misting ring with six replaceable .008 misting nozzles

EVAPORATIVE COOLING WITH A COPPUS COLDFRONT SYSTEM IS IDEAL FOR:

- Equipment and process cooling in high-heat applications
- Setting up indoor or outdoor "cool-down" stations
- Dust and odor suppression
- Adding moisture in dry manufacturing environments to improve the process and reduce potentially hazardous static electrical charges

COMPACT COLDFRONT KIT

The COLDFRONT compact kit consists of a pump motor assembly, filter, power cord with GFCI plug, 25' (7.62 m) high-pressure hose, and 20" (508 mm) or 16" (406 mm) stainless steel misting ring with six high-pressure misting nozzles attached.

FEATURES


- Powerful triplex pump accommodates up to six misting rings
- Quick and easy installation
- High-impact plastic case protects pump, pump motor and filter
- Can reduce ambient temperatures by 10-25° Fahrenheit, depending on relative humidity



COLDFRONT SPECIFICATIONS

PUMP	INDUSTRIAL	COMPACT				
Pressure Range	500-1200 psi	500-1200 psi				
Туре	Tri-Plex plunger	Tri-Plex plunger				
GPM (Max)	.122 GPM	.122 GPM				
Motor HP/AMPS	1 HP/12.8 AMPS	1 HP/12.8 AMPS				
Output Ports	1-quick connect	2-quick connect				
Enclosure	Powder-coated steel	High-impact plastic case				
Water Use/Ring	7.32 g/hr @ 700 psi	7.32 g/hr @ 700 psi				
Water Filter	5 micron	5 micron				
Misting Ring	Stainless steel tubing with six replaceable .008 brass nozzles; available in 16-inch (406 mm) and					

20-inch (508 mm) diameters

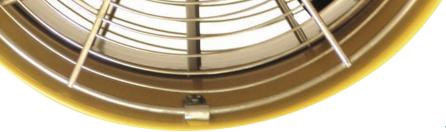

COPPUS® VENTAIR® TM

CENTRIFUGAL **BLOWER**/ **EXHAUSTER**

HIGH-PRESSURE This is a rugged, high-volume, high-pressure centrifugal fan. Backwardly inclined fan blades yield stable air flow through small diameter or long runs of duct. The high static pressure capabilities make this an ideal air mover for supplying fresh air or source-capturing welding and other fumes for multiple remote locations with optional, multiple inlet adapter.

FEATURES


- Available in 1-, 2-, 5-, 15-, and 30-HP motors producing up to 10,700 cfm (18,179 m³/hr)
- One-piece, cast aluminum, spark-resistant, abrasionresistant, dynamically balanced fan wheel
- Heavy-gauge steel housing and base protects fan and motor
- Backward curved airfoil-shaped blades provide nonoverloading power characteristics allowing peak performance through long runs of duct
- TE and EP motors available
- 3500 rpm motor directly connected to the fan wheel

ELECTRICAL SPECIFICATIONS

- Ventair models available with TE or hazardous location EP motors
- EP motors meet NEC Class I, Division I, Group D and Class II, Division I, Groups F, G

OPTIONS AND ACCESSORIES

- Motor starters
- Beaded or flanged diffusers
- Flexible duct
- Multiple inlet duct adapter
- Forklift adapter
- Vibration isolators



TM4

TM5 TM6

TM9



VENTAIR TM shown with optional four-inch (101.6 mm), multiple inlet duct adapter

DIMENSIONS - inches (mm) (weight: lb/kg)

MODEL	Α	В	С	D	E	F	G	н	J	K	L (Outlet)	Wgt.
TM-4	22.5	18.8	14.0	12.0	8.0	2.0	8.0	16.5	1.0	19.0	7.4 x 5.5	110
	(572)	(478)	(356)	(305)	(203)	(51)	(203)	(419)	(25)	(483)	(188 x 10)	(50)
TM-5	26.2	23.6	16.5	15.0	11.7	1.5	10.0	19.5	1.0	22.0	8.7 x 6.6	130
	(665)	(599)	(419)	(381)	(298)	(38)	(254)	(495)	(25)	(559)	(221 x 168)	(59)
TM-6	28.8	24.9	17.5	15.5	12.2	1.5	12.0	22.5	1.0	25.2	9.6 x 7.4	205
	(732)	(632)	(445)	(394)	(311)	(38)	(305)	(572)	(25)	(651)	(244 x 234)	(93)
TM-8	35.6	32.6	22.0	21.0	16.0	2.0	14.0	28.8	1.5	30.0	11.5 x 9.2	550
	(904)	(828)	(559)	(533)	(406)	(51)	(356)	(734)	(38)	(762)	(292 x 234)	(250)
TM-9	42.0 (1067)	38.5	26.0	27.0	22.7	2.0	16.0	31.5	1.5	34.2	11.5 x 9.2 (292 x 234)	670 (250)

PERFORMANCE SPECIFICATIONS

AIR DELIVERY AT 3,500 rpm [cfm (m3/hr)]

			STATIC PRESSURES in WG (mm) to 24" WG max					
MODEL	MODEL HP	FREE AIR	1 in	2 in	3 in	Block		
			(25 mm)	(51 mm)	(76 mm)	Tight		
TM-4	1	1,700 (2,887)	1,560 (2,604)	1,400 (2,379)	1,230 (2,090)	6.0 (152)		
TM-5	2	2,500 (4,248)	2,300 (3,908)	2,100 (3,568)	1,900 (3,228)	8.2 (208)		
TM-6	5	4,100 (6,966)	3,930 (6,677)	3,740 (6,354)	3,560 (6,048)	12.7 (323)		
TM-8	15	7,450 (12,658)	7,250 (12,318)	7,000 (11,893)	6,800 (11,553)	18.6 (472)		
TM-9	30	10,700 (18,179)	10,400 (17,674)	10,100 (17,165)	9,800 (16,665)	24.2 (615)		



COPPUS® PORTAVENT®

VERSATILE CENTRIFUGAL VENTILATOR FOR SOURCE CAPTURE FUME EXHAUST The design, performance and versatility of the PORTAVENT centrifugal ventilator make it ideal for a wide range of industrial applications—welding and other fume removal; small tank purging; equipment cooling; confined space ventilation; and other maintenance and safety applications.



FEATURES


- Available in three models offering 560 to 940 cfm (951 to 1597 m³/hr)
- Direct-drive 3,500 RPM fan motor
- Cast aluminum fan and housing provide spark-resistant construction
- Unique, multi-position stand offers a variety of convenient set-ups
- Accepts flexible duct at inlet and outlet ends
- Backwardly inclined airfoil blades prevent motor overloads
- Inlet and outlet screens meet OSHA standards
- TE and EP motors available on all models



DIMENSIONS - inches (mm)

MODEL	A in	B in			in in	in in in	in	Weig (k	Free Air Delivery	
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	TE	EP	cfm (m³/hr)
PV-500	22.4 (569)	14.8 (376)	19.0 (483)	9.5 (241)	8.4 (213)	5.4 (137)	4.9 (124)	57 (26)	60 (27)	560 (952)
PV-750	22.9 (582)	15.6 (396)	19.0 (483)	9.5 (241)	9.3 (236)	5.9 (150)	5.9 (150)	69 (31)	72 (32)	815 (1385)
PV-1000	22.9 (582)	15.6 (396)	19.0 (483)	9.5 (241)	9.3 (236)	5.9 (150)	5.9 (150)	70 (32)	73 (33)	940 (1597)

ELECTRIC					
ITEM	dBA				
PV500	84				
PV750	87				
PV1000	90				

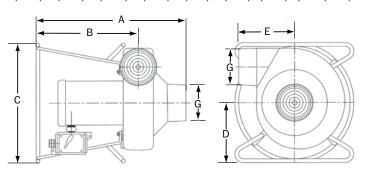

COPPUS® DOUBLE-DUTY" **HEAT KILLER**

INDUSTRIAL FAN FOR COOLING PRODUCTS. **PROCESSES AND PERSONNEL**

POWERFUL With airflows up to 17,000 cfm (28,890 m³/ hr) the Double-Duty™ Heat Killer (DDHK) is one of the most powerful and versatile portable air movers on the market today. The patented, adjustable quide vane design allows air flow control—from a gentle breeze for personnel cooling, to a concentrated jet blast for product and process cooling.



- Adjustable guide vanes allow varied air movement from a gentle breeze to a jet blast
- Available in 18" (457mm), 24" (610mm) and 30" (762 mm) models
- 24" (610 mm) models available with twospeed, totally enclosed motor (115V only)
- Models available in floor stand or wall mount
- Heavy-duty, rugged steel housing and frame
- Protective screens meet OSHA guidelines
- Available with TE and EP motors
- Hazardous location switches and motors meet NEC Class I, Division I, Group D and Class II, Division I, Groups F and G specifications
- Thermal overload protection on motors Please note: EP plugs sold separately to meet local codes





PERFORMANCE SPECIFICATIONS

MODEL	FAN SIZE		МОТ	OR	AIR VOLUME		
MODEL	in	mm	HP	rpm	cfm	m³/hr	
18K03D	18	457	1/3	1,750	4,100	6,970	
24K07D	24	610	3/4	1,750	7,100	12,060	
24K10D	24	610	1	1,750	9,500	16,140	
30K30D	30	762	3	1,750	17,000	28,890	

FLOOR STAND DIMENSIONS - inches (mm)


FAN SIZE	A	В	С	D	E	F	G	NET Wt. lbs (kg)
18 in	23.0	21.3	36.5	24.0	24.3	7.5	21.3	140
(457 mm)	(584)	(541)	(927)	(610)	(617)	(190)	(540)	(59)
24 in	29.6	28.3	39.5	28.0	36.5	9.5	25.0	180
(610 mm)	(752)	(719)	(1003)	(711)	(927)	(241)	(635)	(82)
30 in	36.8	33.4	39.5	28.0	36.5	9.5	28.0	230
(762 mm)	(935)	(848)	(1003)	(711)	(927)	(241)	(711)	(104)





WALL MOUNT DIMENSIONS - inches (mm)

FAN SIZE	Α	В	С	D	E	F	G
18 in	23.0	21.3	39.3	29.2	18.7	20.0	21.3
(457 mm)	(584)	(541)	(998)	(742)	(475)	(508)	(540)
24 in	29.6	28.3	47.6	36.4	22.9	24.0	25.0
(610 mm)	(752)	(719)	(1208)	(925)	(582)	(610)	(635)
30 in	36.8	33.4	52.7	39.6	25.1	26.1	28.0
(762 mm)	(935)	(848)	(1338)	(1006)	(638)	(664)	(711)



DDHK WALL MOUNT KIT

Easy retrofit wall mount kits are available for existing floor stand models; kits include wall bracket and fan U-bracket.

- Frees up valuable floor space
- Ensures permanent location
- Design permits 360-degree rotation with a total tilt up or down of 155-degrees (90-degrees down, 65-degrees up)

Electric					
ITEM	dBA				
18K03D	72				
24K07D	79				
24K10D	85				
30K30D	92				



AIR VELOCITIES: fpm (m/min) at various distances from fan

MODEL	10-ft (3 m) 30-ft ((9 m) 50-ft (15 m)		70-ft (21 m)		90-ft (27 m)		
MODEL	JB*	DF*	JB	DF	JB	DF	JB	DF	JB
18K03D	1100 (335)	425 (130)	450 (137)	260 (79)	350 (107)	180 (55)	275 (84)	135 (41)	
24K10D	1675 (508)	670 (203)	840 (255)	375 (114)	560 (170)	280 (85)	350 (106)	230 (70)	185 (56)
30K30D	2250 (686)	1280 (390)	1000 (304)	520 (159)	900 (274)	340 (104)	700 (213)	310 (95)	475 (145)

*Jet Blast (JB) Diffused Flow (DF)

COPPUS® ACCESSORIES

FLEXIBLE AIR DUCT

A large selection of flexible air duct for a variety of ventilation applications is available. Our most popular heavy-duty duct features impregnated polyester material designed for harsh, industrial environments. Other options include economical light-duty duct, source capture duct and hazardous location, antistatic duct.



FEATURES AND SPECIFICATIONS (ALL VARIETIES)

- Wire supported, non-collapsible
- Quick and easy cinch belt securely fastens duct to blower housings and duct ends
- Integral rigid duct end allows easy coupling of duct without the need for separate splicer accessory
- Available diameters are 8" (203 mm), 12" (304.8 mm), 16" (406 mm), 20" (508 mm), and 24" (610 mm); larger diameters available on request
- Available lengths: 10' (3 m) and 2' (7.5 m); duct can be coupled together for longer runs
- Temperature range: -40° F (-40 degrees C) to +250° F (+121° C)
- Meets UL-94 specifications for flame retardant material
- Retractable for easier, safer storage
- Source capture duct: close-pitched, wire-supported, features smooth interior walls for reduced flow restriction; available in 4" (102 mm), 5" (127 mm) and 6" (152 mm) diameters



DUCT CANISTER

Extend the life of your duct with the protection of a COPPUS high-density, light-weight polyethylene canister; makes transporting and storage easier and safer.

Canisters for available duct sizes:

- 8" x 25' (203 mm x 7500 mm)
- 12" x 20' (305 mm x 6000 mm)
- 16" x 30' (406 mm x 9000 mm)



JECTAIR TRIPOD

For stationary, long-term use; rotates 360 degrees for precise direction of airflow and accommodates 3-HP and 6-HP Jectair sizes. Installs quickly and easily with two quick-release clamps. Large feet provide stability during operation, and spring-loaded legs fold up for easy transport and storage.



SOURCE CAPTURE HOOD

Available for 5" and 6" air duct.



TRANSPORT CART

Heavy-duty cart allows easier transportation of VANO 175CV and 250CV ventilators (which can remain on cart during operation); includes crane-lifting loop. WEIGHT: 25 lbs (11kg)



VANO TRIPOD

Attaches to VANO 175CV or 250CV model; makes positioning of units and direction of airflow easier by rotating 360 degrees on a 45-degree plane; spring-loaded legs fold up for easy transport and storage.

WEIGHT: 19 lbs (9kg)


COPPUS® CP-20

AIR- OR STEAM-TURBINE-DRIVEN BLOWER/ EXHAUSTER This powerful fan is designed for fast and thorough degassing, ventilating or cooling of large process vessels such as columns, towers, reactors, scrubbers, furnaces and storage tanks.

FEATURES


- Delivers air flow up to 11,200 cfm (19,029 m³/hr)
- Can be used as blower or exhauster
- Fits 20" (508 mm) API tank opening
- Cast aluminum housing and fan blade
- Stainless steel turbine buckets
- Dual inlet stainless steel nozzles expand steam or compressed air up to 150 psig
- Fan assembly shaft rotates on permanently sealed ball bearings



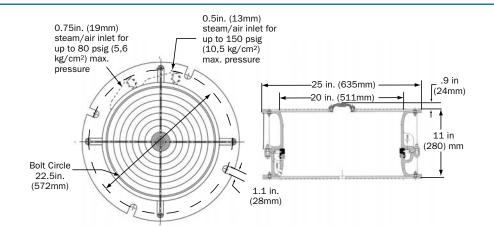

AIR- AND STEAM- DRIVEN							
ITEM	PSIG	dBA					
CP 20	80	108					
CP 20	60	107					
CP 20	40	105					

PERFORMANCE



A=80 psig (5, 6 kg/cm²) at large nozzle or 150 psig (10,6 kg/cm²) at small B=60 psig (4, 2 kg/cm²) at large nozzle or 115 psig (8, 1 kg/cm²) at small C=40 psig (2, 8 kg/cm²) at large nozzle or 80 psig (5, 6 kg/cm²) at small

Blue numbers on chart indicate metric measurement

STEAM AND AIR CONSUMPTION

STEAM/AIR PRESSURE	lbs	NSUMPTION s/hr j/hr)	AIR CONSUMPTION scfm (m³/hr)		
psig (kg/cm²)	SMALL NOZZLE	LARGE NOZZLE	SMALL NOZZLE	LARGE NOZZLE	
150 (10.6)	640 (209)		220 (178)		
115 (8.1)	510 (231)		178 (302)		
80 (5.6)	380 (172)	740 (336)	128 (217)	250 (425)	
60 (4.2)		590 (268)		194 (330)	

COPPUS® REACTION FANS

(RF-12, RF-16, RF-20, RF-24)

AIR-DRIVEN Rugged, cast aluminum housing and fan

REACTION FANS blade make these fans ideal for hazardous locations and demanding ventilation projects. The RF design utilizes action-reaction principles; compressed air is discharged through nozzles located at the tip of the fan blade providing extremely efficient, highvolume, low-maintenance air movers.



RF-20, RF-24 FEATURES

- 11,000 to 16,900 cfm (18,689 to 28,713 m3/hr) at 80 psig
- Use for fresh air supply or fume exhaust
- Can be carried or rolled to job site
- Spark-resistant cast aluminum housing and fan blade
- Permanently lubricated bearings
- Flanges mate with 20" (508 mm) and 24" (610 mm) API tank openings



RF-12

RF-12, RF-16 FEATURES

- 2,100 to 5,100 cfm (3,566 to 8,665 m3/hr) at 80 psig
- Use for fresh air supply or fume exhaust
- Low compressed air consumption
- Spark-resistant, cast-aluminum housing and fan blade
- Virtually maintenance free
- Permanently lubricated bearings eliminate line oiler
- Cast-in handles and feet
- Cast-in bead to accept 12" (305 mm) and 16" duct (406
- Bolt holes allow attachment of optional adapter plates



RF-16

SWING-OUT ASSEMBLY FOR RF-20/24 AND CP-20

Personnel and equipment egress or entrance to tanks and vessels can be achieved quicker, easier and safer with the RF-20/24 and CP-20 swing-out models; mounts to standard API 20" (508 mm) or 24" (610 mm) tank openings. Swing-out gate (constructed of cast aluminum) is held in closed position with industrial strength hook and loop fastener that can be opened and closed easily by pulling or pushing.



RF-12, RF-16 PERFORMANCE SPECIFICATIONS AIR FLOW THROUGH FLEXIBLE DUCT AT 80 psig [cfm (m³/hr)]

MODEL	DUCT DIAMETER	STRAIGHT LENGTH OF DUCT						
	in (mm)	20 foot (6 m)	30 foot (9 m)	40 foot (12 m)	50 foot (15 m)	100 foot (31 m)		
RF-12	12 in	2,020	1,960	1,910	1,870	1,680		
	(305 mm)	(3,433)	(3,331)	(3,246)	(3,178)	(2,855)		
RF-16	16 in	4,850	4,750	4,600	4,550	4,150		
	(406 mm)	(8.241)	(8.071)	(7,816)	(7.731)	(7,052)		

0.4375-in (11 mm) bolt holes for faceplate, handle (1) leg holes 13.5-in (343 mm) on center. 0.75-in NPT inlet Bolt circle, 3 each side 100 psig (7 kg/cm) max. compressed air only


RF-12, RF-16 FREE AIR OPERATING DATA AIR FLOW DIVIDED BY CONSUMED AIR=DELIVERY RATIO (EFFICIENCY)

MODEL INLET PRESSURE		AIR CONSUMPTION		TOTAL AIR FLOW		DELIVERY	
MODEL	psig	kg/cm²	scfm	m³/hr	scfm	m³/hr	RATIO
RF-12	80	5.6	61	104	2,140	3,636	35
RF-16	80	5.6	144	246	5,100	8,665	35

RF-12, RF-16 DIMENSIONS (in/mm)

MODEL	Α	В	С	D	E	F	G	Wt.
RF-12	14.5	6.4	12.0	10.5	10.9	11.8	10.8	39 lbs
	(368)	(163)	(305)	(267)	(276)	(299)	(273)	18 kg
RF-16	16.4	8.4	17.4	14.5	15.4	15.8	12.0	50 lbs
	(416)	(213)	(442)	(368)	(391)	(401)	(305)	23 kg

Faceplate bolt holes 0.625-in (16 mm), holes 17.5-in (445 mm) on center, bolt circle, 4 each side



RF-20, RF-24 DIMENSIONS - in (mm)

MODEL	Α	В	_	D	E	BOLT S	LOTS	Wt.
MODEL	A	В	C	D		SIZE	No.	VVI.
RF-20	10.2 (260)	24.7 (629)	22.5 (572)	19.5 (495)	0.75 (19)	1.12 (28.4)	4	69 lbs 31 kg
RF-24	11.6 (294)	31.2 (794)	30.2 (768)	24.0 (610)	1 (25)	1.12 (28.4)	4	160 lbs 73 kg

RF-20, RF-24 FREE AIR OPERATING DATA AIR FLOW DIVIDED BY CONSUMED AIR=DELIVERY RATIO (EFFICIENCY)

MODEL	INLET P	RESSURE	AIR CONSUMPTION		TOTAL A	IR FLOW	DELIVERY RATIO
	psig	kg/cm²	scfm	m³/hr	scfm	m³/hr	
RF-20	60	4.2	160	271	7,000	11,893	59
	80	5.6	210	375	11,000	18,689	53
RF-24	60	4.2	324	550	14,600	24,804	45
	80	5.6	400	680	16,900	28,713	42

CONTACT FACTORY FOR PERFORMANCE THROUGH 20-INCH (508 mm) and 24-INCH (610 mm) AIR DUCT

NPT inlet (E) 100 psig (7, 0 kg/cm²) max. compressed air only .12-in (28.4 mm)

RF-20 PERFORMANCE

AIR- DRIVEN

PSIG

80

60

80

60

80

60

80

60

dBA

104

101

109

107

108

106

111

109

ITEM

RF 12

RF 12

RF 16


RF 16


RF 20

RF 20

RF 24

RF 24





COPPUS® JECTAIR® HP & HORNET HP

PERFORMANCE,
HIGH-EFFICIENCY
VENTURI AIR MOVERS

HIGHANCE,
Jectair® HP is recognized throughout the industry. When compared with older-style air horns, the patented air mixing chamber of the Jectair® HP can produce up to a 40:1 air flow conversion and up to 26 percent savings on compressed air consumption (see efficiency performance charts on next page).



OPERATING PRINCIPLE

Compressed air or steam is admitted into the Jectair through a single inlet connection in the housing leading to the mixing chamber. The air or steam jetted from the nozzle creates a "Venturi" action that induces a large volume of surrounding air to enter the Jectair through the aerodynamic inlet bell. The air is then discharged at high velocity through the horn-shaped diffuser.

NOTE: Operating efficiency depends on compressed air volume and pressure (see efficiency performance charts on next page).

JECTAIR® HORNET FEATURES

The Jectair Hornet HP features a lightweight, shock-resistant, conductive polymer diffuser that is virtually indestructable

- Available in three sizes: 3S-HP, 3-HP, and 6-HP
- Polymer safely dissipates static electricity charges
- Diffuser is constructed of linear low-density polyethylene, rated UL 94-V2 with maximum operating temperature of 160° Fahrenheit (93° Celcius)



FEATURES

- Available in five sizes: 3S-HP, 3-HP, 6-HP, 8, or
- High-performance (HP) and Hornet models available in three sizes: 3S-HP, 3-HP, and 6-HP
- Air flows range from 1,370 to 8,900 cfm (2,328 to 15,121 m³/hr)
- Induction ratios up to 40:1
- Multiple expansion nozzles machined into housing
- High static pressure capabilities
- Diffuser material available in steel, aluminum or shock-resistant polymer (Hornet HP)
- No moving parts (virtually maintenence-free)
- Static bonding cable (standard on all models) with spring tension grip and replaceable contact tips
- Accepts flexible duct on diffuser end (optional duct adapter for inlet end available)
- Tripod for stationary mounting available (see accessories, page 17)

EFFICIENCY PERFORMANCE

INDUCTION RATIO = cfm of total airflow/cfm of compresed air

			•	
INLET PRESSURE	MODEL	AIR FLOW cfm (m³/hr)	AIR CONSUMED (scfm)	INDUCTION RATIO
60 psig 4,2 kg/cm²	3S-HP	1370 (2328)	47 (80)	29.1
	3-HP	1520 (2595)	47 (80)	32.3
	6-HP	3980 (6762)	98 (167)	40.6
	8	5600 (9515)	178 (302)	31.5
	9	6880 (11,096)	265 (450)	25.8

INLET PRESSURE	MODEL	AIR FLOW cfm (m³/hr)	AIR CONSUMED (scfm)	INDUCTION RATIO
	3S-HP	1530 (2600)	61 (104)	25.1
80 psig 5,6 kg/cm²	3-НР	1700 (2888)	61 (104)	27.8
	6-HP	4500 (7645)	126 (214)	35.7
	8	6250 (10,620)	233 (396)	26.8
	9	8000 (13,592)	366 (571)	23.8


INLET PRESSURE	MODEL	AIR FLOW cfm (m³/hr)	AIR CONSUMED (scfm)	INDUCTION RATIO
	3S-HP	1660 (2820)	72 (122)	23.0
	3-HP	1860 (3160)	72 (122)	25.8
100 psig 7 kg/cm²	6-HP	4870 (8274)	153 (260)	31.8
	8	6750 (11,469)	282 (479)	23.9
	9	8900 (15,121)	410 (697)	21.7

Maximum operating pressure of 150 psig on compressed air or steam

PERFORMANCE THROUGH VARIOUS LENGTHS OF FLEXIBLE DUCT AT 80 PSIG (7 KG/CM²)

High static pressure capabilities of the Jectair HP air mover permit use of long runs of flex-ible duct on outlet or inlet diffuser

MODEL	DUCT	FREE AIR	20-ft /6 m	30-ft / 9 m	40-ft / 12 m	50-ft / 15 m
	diameter	cfm (m³/hr)	cfm (m³/hr)	cfm (m³/hr)	cfm (m³/hr)	cfm (m³/hr)
3-HP	8-in	1700	1550	1480	1410	1350
	(203 mm)	2888	(2634)	(2515)	(2396)	(2294)
6-HP	12-in	4500	4020	3860	3715	3580
	(305 mm)	(7645)	(6830)	(6558)	(6312)	(6083)
8	14-in	6250	5550	5280	5050	4850
	(356 mm)	(10,620)	(9431)	(8972)	(8581)	(8241)
9	14-in	8000	6850	6550	6250	6000
	(356 mm)	(13,592)	(11,640)	(11,130)	(10,620)	(10,195)

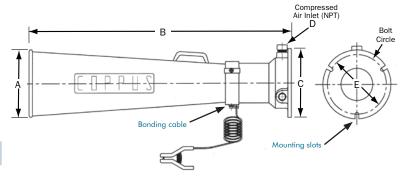

MODEL	Δ	A B C D		D	MOUNTING SLOTS			Wt.	
MODEL	^		Č		E	No.	Width	****	
3S-HP	6.0 (152)	16.5 (419)	7.5 (190)	0.5 (13)	6.5 (165)	3	0.4 (10)	6 lbs (2, 7 kg)	
	(132)	(417)	(190)	(13)	(103)		(10)	(2, / Kg)	
3-HP	7.3	33.0	7.5	0.5	6.5	3	0.4	9 lbs	
0 111	(185)	(838)	(190)	(13)	(165)		(10)	(4, 1 kg)	
6-HP	12.0 (305)	44.2 (1123)	11.5 (292)	1 (25)	10.8 (274)	3	0.4 (10)	21 lbs (9, 5 kg)	
8	14.0 (356)	46.0 (1168)	14.3 (363)	1 (25)	13.5 (343)	3	0.5 (13)	35 lbs (15, 9 kg)	
9	14.0 (356)	46.0 (1168)	16.8 (427)	1 (25)	15.3 (387)	10	0.9 (23)	42 lbs (19, 0 kg)	

SAFETY PRECAUTIONS

- Use bonding cables (standard on all COPPUS Jectair air movers) when operating in hazardous locations to prevent static electricity discharges
- Secure unit before admitting compressed air (or steam) to prevent damage or injury from high-reaction force
- Do not allow solid objects or debris to enter inlet housing during operation
- When exhausting fumes from an enclosed vessel, take care not to create a vacuum that could collapse the vessel

BLOCKED TIGHT STATIC PRESSURE

		INLET PRESSURE							
MODEL	60 psig	80 psig	100 psig						
	(4,2 kg/cm²)	(5,6 kg/cm²)	(7 kg/cm²)						
3S-HP	5.8-in	7.5-in	8.9-in						
	(147 mm)	(191 mm)	(224 mm)						
3-HP	5.8-in	7.5-in	8.9-in						
	(147 mm)	(191 mm)	(224 mm)						
6-HP	4.3-in	5.6-in	6.7-in						
	(109 mm)	(132 mm)	(170 mm)						
8	3.9-in	5.2-in	6.2-in						
	(99 mm)	(132 mm)	(157 mm)						
9	5.5-in	6.8-in	7.7-in						
	(140 mm)	(173 mm)	(196 mm)						

VENTURI								
ITEM	PSIG	dBA	ITEM	PSIG	dBA			
JECTAIR 3	80	88	JECTAIR 8	80	94			
JECTAIR 3	60	85	JECTAIR 8	60	91			
JECTAIR 3	40	81	JECTAIR 8	40	87			
JECTAIR 6	80	92	JECTAIR 9	80	95			
JECTAIR 6	60	89	JECTAIR 9	60	92			
JECTAIR 6	40	85	JECTAIR 9	40	88			

COPPUS® MARINE VENTILATORS

MARINE
VENTILATORS:
STEAM-, AIR-, AND WATER TURBINE-DRIVE
VENTILATORS

MARINE COPPUS marine ventilators are rugged, dependable cargo tank ventilators that have served the shipping industry for many years.

They are ideal for on-board gas-freeing, drying and ventilation operations and are available in supply or exhaust models.



STEAM/COMPRESSED AIR TURBINE-DRIVE MODELS

C-12A SUPPLY delivers 5,350 cfm (9,090 m³/hr)

C-12A EXHAUST delivers 4,600 cfm (7,815 m³/hr)

C-15A SUPPLY delivers 8,400 cfm (14,275 m³/hr)

C-15A EXHAUST delivers 6,500 cfm (11,040 m³/hr)





Adapter allows Marine Ventilators to mate with Butterworth and other deck and tank openings. Adapters available with or without fixed guide vanes.

FEATURES

- Cast-iron turbine housing with aluminum cover
- Bronze turbine wheel and stainless steel turbine blades/ nozzles
- Spark-resistant cast aluminum fan and fan housing
- Stainless steel fasteners, studs and protective screen


WATER TURBINE DRIVE MODELS

C-12AWC SUPPLY delivers 5,000 cfm (8,495 m³/hr)

C-12AWC EXHAUST delivers 4,700 cfm (7,985 m³/hr)

C-15AWC SUPPLY delivers 7,400 cfm (12,573 m³/hr)

C-15AWC EXHAUST delivers 5,700 cfm (9,769 m³/hr)



Air/Steam Model

FEATURES

- Anodized cast aluminum motor housing, impeller, inlet/ outlet connections
- Permanently sealed, lubricated stainless steel ball bearings
- Stainless steel fasteners and protective screen

Water Model I.5 in (38mm) NH water unter connection Connection Water Model I.5 in (38mm) NH water unter connection Connection Connection Connection D Bolt Circle E Bolt Circle

DIMENSIONS FOR MARINE VENTILATORS

MODEL	A in	В	C	D	E	M		Wt
MODEL	(mm)	in (mm)	in (mm)	in (mm)	in (mm)	Size	No.	lbs (kg)
C-12A	12.6 (321)	20.5 (521)	12.5 (318)	15.3 (388)	16.8 (427)	0.93 (24)	10	100 (45)
C-15A	21.0 (533)	22.2 (563)	15.3 (388)	20.5 (521)	21.5 (546)	1.12 (28)	8	120 (54)
C-12 AWC	14.8 (376)	22.5 (572)	12.5 (318)	15.3 (388)	16.8 (427)	0.93 (24)	10	40 (18)
C-15 AWC	16.5 (419)	24.5 (622)	15.2 (386)	20.5 (521)	21.5 (546)	1.12 (28)	8	53 (24)

COPPUS® MARINE VENTURI

MARINE VENTURI:
LIGHTWEIGHT,
DECK-MOUNT,
COMPRESSED AIR
DRIVE VENTILATOR

Easy to transport, rugged and maintenance-free shipboard ventilator for degassing or delivering fresh air supply to cargo tanks and other on-board confined spaces

FEATURES

- Delivers 4,870 cfm (8,274 m³/hr) operating with 100 psig compressed air
- Spark-resistant, corrosionresistant, powder-coated aluminum construction
- Weighs only 32 lbs (15 kg)
- Mates with 12" (320 mm)

Butterworth deck openings in either supply or exhaust set-up


- Built-in flange on outlet end accepts 12" (320 mm) flexible duct, nozzles
- Stainless steel fasteners, studs, and protective screen

OPERATING PRINCIPLE

Compressed air or steam is admitted into the Marine Venturi through a single inlet connection in the housing leading to the mixing chamber. The air from the nozzle creates a Venturi action that induces a large volume of surrounding air to enter through the inlet end. The air is then forced out through the outlet at high velocity.

SPECIFICATIONS FOR MARINE VENTURI

psig (kg/cm²)	cfm (m³/hr)	cfm (m³/hr)	INDUCTION RATIO	
60 4.2	3,980 (6,762)	98 (167)	40.6	
80 5.6	4,500 (7,645)	126 (214)	35.7	
100 7	4,870 (8,274)	150 (214)	31.8	

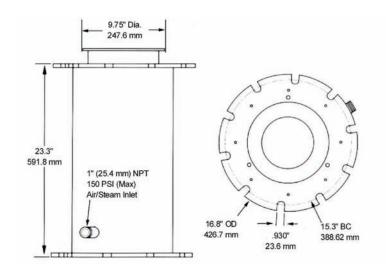



INDUSTRIES SERVED

COPPUS portable ventilators serve a variety of industries that require a reliable fresh air supply in confined spaces for process cooling, equipment cooling and personnel cooling to increase safety and improve production.

These industries include...

PAINTING AND COATING: Drying and curing, fume exhaust, fresh air supply for comfort and safety

HIGH-HEAT PROCESS STEEL: Process cooling, personnel cooling

ELECTRIC AND GAS UTILITIES: Underground ventilation, equipment cooling, fume exhaust

PAPER: Confined space ventilation, personnel cooling

SHIPBUILDING: Welding fume exhaust, fresh air supply

MARINE: Cargo tank ventilation

OIL REFINING: Equipment cooling, confined space ventilation, personnel cooling

CHEMICAL MANUFACTURE: Fume exhaust and ventilation, personnel cooling

BEVERAGE: Fume exhaust, process cooling

POWER GENERATION: Confined space ventilation, personnel cooling



P. O.Box 181926, Dubai - UAE
Tel.: +971 4 2289927 Fax: +971 4 2289947
Email: sales@profenuae.com, www.profenuae.com

For more information about COPPUS portable ventilation products, contact us at:

Dresser-Rand

299 Lincoln Street Worcester, MA 01605 Phone: 508-595-1700

Fax: 508-595-1786